
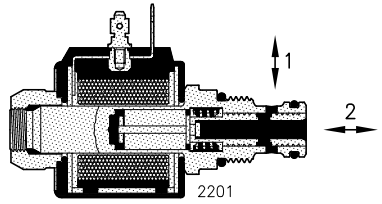

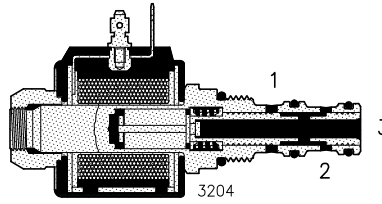

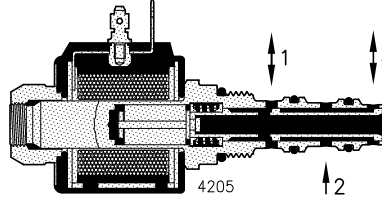

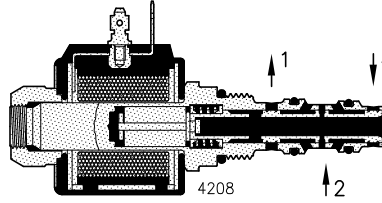


Single solenoid valves.

They are simple solenoid valves with two, three and four way, manufactured in sizes 20, 30 and 50 and in several circuits, are used in compact applications settled in manifolds.

The solenoid ETD series utilize power coils and are suitable for working till 315 bar.

The duty current coils (12-24 Volt) can be directly fed; otherwise for alternate current coils (24-110-220 Volt 50/60 Hz) a connector with rectifier bridge is required, which can be supplied on request.

Main features	Type	Q max. (l/min.)	P max. (bar)	Technical schedule
ETD../22.. series – two-ways type. Normally open or closed, have better performances with flow from 1 to 2, in the opposite direction it's necessary to limit flow.  	ETD 20/2201	15	210	09.010
	ETD 30/2201	30	315	09.020
	ETD 50/2201	60	315	09.030
	ETD 20/2202	15	210	09.010
	ETD 30/2202	30	315	09.020
	ETD 50/2202	60	315	09.030
ETD../32.. series – three-way type. Manufactured with two different circuits in order to obtain highest performances. With flow direction opposit to symbols it's necessary to limit flow and max. pressure.  	ETD 20/3203	15	210	09.040
	ETD 30/3203	30	315	09.050
	ETD 50/3203	60	315	09.060
	ETD 20/3204	15	210	09.040
	ETD 30/3204	30	315	09.050
	ETD 50/3204	60	315	09.060
ETD../42.. series – four-way type centre closed.  	ETD 20/4205	15	315	09.070
	ETD 30/4205	30	315	09.080
	ETD 50/4205	60	315	09.090
	ETD 20/4206	15	315	09.070
	ETD 30/4206	30	315	09.080
	ETD 50/4206	60	315	09.090
ETD../42.. series – four-way type centre open.  	ETD 20/4207	12	315	09.100
	ETD 30/4207	25	315	09.110
	ETD 50/4207	45	315	09.120
	ETD 20/4208	12	315	09.100
	ETD 30/4208	25	315	09.110
	ETD 50/4208	45	315	09.120