


BSG-03-06-10-2P

Solenoid Controlled Relief Valves-Dual Pressure (Sub-Plate Type)







Valve Specifications & Attachment

Model	BSG-03	BSG-06	BSG-10
Flow Rating	100 lpm (26.4 gpm)	200 lpm (52.8 gpm)	400 lpm (106 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	7.1 (15.6)	8.0 (17.6)	11.3 (24.9)
CODE:20	M12 X70LgX2pcs M12 X89LgX2pcs	M16 X60LgX2pcs M16 X80LgX2pcs	M20X70LgX2pcs M20X90LgX2pcs
CODE:2090	1/2-13UNCX2-3/4LgX2pcs 1/2-13UNCX3-3/4LgX2pcs	5/8-11UNCX2-1/4LgX2pcs 1/2-13UNCX3-1/4LgX2pcs	3/4-10UNCX2-3/4LgX2pcs 3/4-10UNCX3-1/2LgX2pcs
Surface O-Ring	P9X1pc, P20X2pc	P10AX1pc, P29X2pc	P10AX1pc, P36X2pc
ISO Mounting	6264-AR-06-2-A	6264-AS-08-2-A	6264-AT-10-2-A



SYMBOL

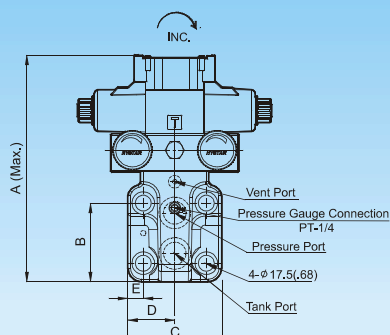


■ Dimensions for models with Din connector, reference page 14 for details.

Model	A	B	C	D	E	F	G	H	I	J
BSG-03-2P	224(8.81)	75.5(2.97)	83(3.26)	41.5(1.63)	14.5(.57)	70(2.75)	77.5(3.05)	40(1.57)	41(1.61)	146(5.74)
BSG-06-2P	251.5(9.90)	87.5(3.44)	104(4.09)	52(2.04)	17(.66)	78(3.07)	60(2.36)	40(1.57)	41(1.61)	146(5.74)
BSG-10-2P	289.5(11.3)	106(4.17)	125(4.92)	62.5(2.46)	21.2(.83)	83(3.26)	69.5(2.73)	49.5(1.94)	46(1.81)	280(11.0)

SBSG-03-06-10

Low Noise Type Solenoid Controlled Relief Valves(Sub-Plate Type)




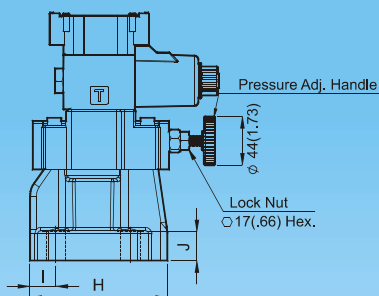


Valve Specifications & Attachment

Model	SBSG-03	SBSG-06	SBSG-10
Flow Rating	100 lpm (26.4 gpm)	200 lpm (52.8 gpm)	400 lpm (106 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	6.3 (13.9)	7.2 (15.9)	12.7 (28.0)
CODE:20	M12 X40LgX4pcs	M16 X50LgX4pcs	M20 X60LgX4pcs
CODE:2090	1/2-13UNCX1/3LgX4pcs	5/8-11UNCX2LgX4pcs	3/4-10UNCX2-1/4LgX4pcs
Surface O-Ring	P9X1pc, P20X2pc	P10AX1pc, P28X2pc	P10AX1pc, P36X2pc
ISO Mounting	6264-AR-06-2-A	6264-AS-08-2-A	6264-AT-10-2-A



SYMBOL

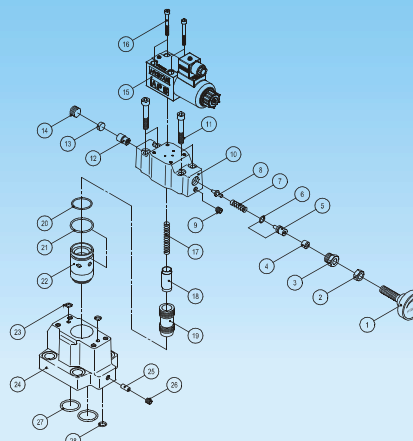

■ Dimensions for models with Din connector, reference page 14 for details.

Model	A	B	C	D	E	F	G	H	I	J	K
S-BSG-03	78(3.07)	54(2.12)	27(1.06)	12(.47)	34.5(1.35)	54(2.12)	169(6.65)	107(4.21)	26.5(1.04)	23(.90)	222(8.74)
S-BSG-06	100(3.93)	70(2.75)	35(1.37)	15(.59)	23.5(.92)	67(2.63)	171(6.73)	124(4.88)	23.5(.92)	26(1.02)	224(8.81)
S-BSG-10	127(5.00)	82.6(3.25)	41(1.61)	22.2(.87)	20.5(.80)	89(3.50)	190(7.48)	155(6.10)	20.5(.80)	36(1.41)	273(10.7)