



PRESSURE CONTROL VALVES

DIMENSIONS

MILLIMETERS(INCHES)


Unloading Relief Valves(Sub-Plate Type) BUCG-06 Series

Ordering Code



BUC - G - 06 - B - 20

Series No	Type of Mounting	Valve Size	Pressure Range	Design No
BUC: Unloading Relief Valve	G Subplate Mounting	06: (3/4")	B: 25~70 bar (360~1000 PSI)	20 (G) DIN 912 bolts
		10: (1 1/4")	C: 35~140 bar (500~2000 PSI)	2090 (G) UNC bolts (North America)
			H: 70~210 bar (1000~3000 PSI)	

BUCG-06



BUCG-10




SYMBOL



BUCG-06 Unloading Relief Valves(Sub-Plate Type)

Valve Specifications & Attachment

Model	BUCG-06
Flow Rating	125 lpm (33 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	12 (26.4)
CODE:20	M16 X55LgX2pcs M16 X110LgX2pcs M16 X130LgX2pcs
CODE:2090	5/8-11UNCX2-1/4LgX2pcs 5/8-11UNCX4-1/2LgX2pcs 5/8-11UNCX5LgX2pcs
Surface O-Ring	P9X1pc, P29X2pc

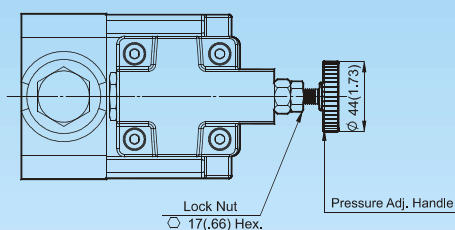

Lock Nut
17(.66) Hex.

Pressure Adj. Handle

