



■ Ordering Code


CL - T - 06 - C - 20



SYMBOL


Series No	Type of Mounting	Valve Size	Spool Type	Design No
CL: Cam Operated Directional Valves	G Subplate Mounting 	03: (3/8") ISO ***	None: Normally Open Type	20 (G) DIN 912 bolts 
CLT: 	T Threaded Connection 	06: (3/4") ISO ***	C: Normally Closed Type	2090 (G) UNC bolts (North America) 
CLG: 		10: (1 1/4") ISO ***		20 (T) PT Connection 
				2090 (T) NPT Connection (North America) 

CLT




MODEL	DESCRIPTION	PAGE
CLT-03-06	Deceleration with Check Valves(Threaded Type)	303
CLG-06	Deceleration with Check Valves(Sub-Plate Type)	303

CLT



CLG




CLG-06



DIMENSIONS

MILLIMETERS(INCHES)

CLT-03-06 Deceleration with Check Valves(Threaded Type)


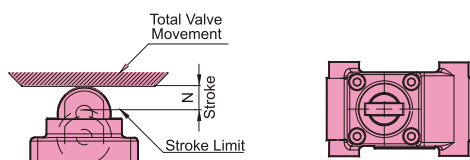


Valve Specifications & Attachment

Model	CLT-03	CLT-06
Flow Rating	30 lpm (7.92 gpm)	85 lpm (22.4 gpm)
Max. Pressure	140 bar (2000 psi)	140 bar (2000 psi)
Weight kg(lbs.)	5 (11.0)	5 (11.0)
CODE:20	3/8" PT	3/4" PT
CODE:2090	3/8" NPT	3/4" NPT




SYMBOL

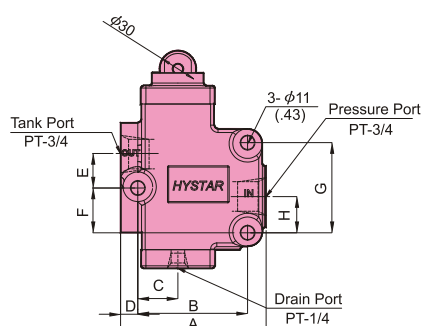

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
CLT-03	116(4.56)	84(3.30)	31(1.22)	16(.62)	34(1.33)	16(.62)	68(2.67)	26(1.02)	161(6.33)	144.5(5.68)	68(2.67)	34(1.33)	8(.31)	27(1.06)	12(.47)
CLT-06	118(4.64)	90(3.54)	33(1.29)	13.5(.53)	28(1.10)	35(1.37)	73(2.87)	29(1.14)	176.5(6.94)	158.5(6.24)	76(2.99)	38(1.49)	9.5(.37)	30(1.18)	12(.47)

CLG-06 Deceleration with Check Valves(Sub-Plate Type)



Valve Specifications & Attachment

Model	CLG-06
Flow Rating	85 lpm (22.4 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	9 (19.8)
CODE:20	M10X100LgX4pcs
CODE:2090	3/8-16UNCX4LgX4pcs
Surface O-Ring	P28X2pc



SYMBOL

