DIMENSIONS MILLIMETERS(INCHES)

D

DBG-03 Pilot Operated Relief Valves(Sub-Plate Type)

SYMBOL

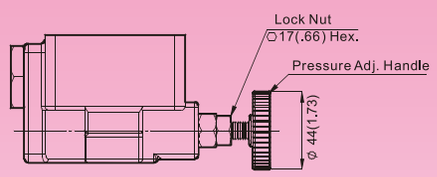

■ Valve Speciations & Attachment

Model	DBG-03-20	DBG-03-30
Flow Rating	40 lpm (10.5 gpm)	40 lpm (10.5 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	3 (6.6)	3.5 (7.7)
CODE:20	M10X55Lgx4pc	M10X55Lgx4pc
CODE:2090	3/8-16UNCX2-1/4LgX4pcs	3/8-16UNCX2-1/4LgX4pcs
Surface O-Ring	P9X1pc, P18X2pc	P9X1pc, P18X2pc



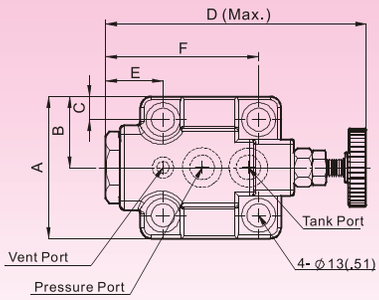



Model	A	B	C	D	E	F	G	H
DBG-03-20	80(3.14)	40(1.57)	13(.51)	147(5.78)	86(3.38)	32(1.25)	72(2.83)	42(1.65)
DBG-03-30	80(3.14)	40(1.57)	13(.51)	165(6.49)	89(3.50)	35(1.37)	87(3.42)	42(1.65)

DBT-03 Pilot Operated Relief Valves(Threaded Type)

SYMBOL



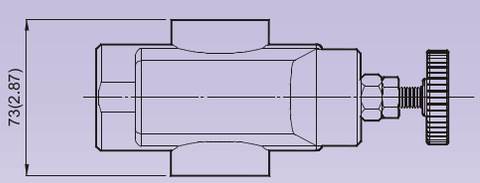

■ Valve Speciations & Attachment

Model	DBT-03
Flow Rating	40 lpm (10.5 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	3 (6.6)
CODE:20	3/8" PT
CODE:2090	3/8" NPT



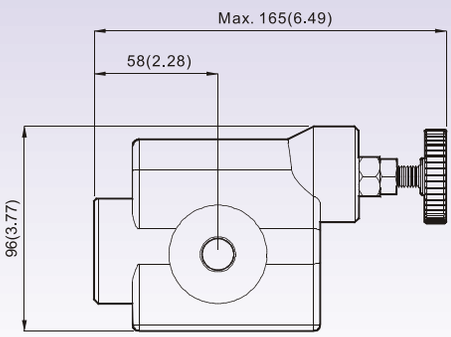

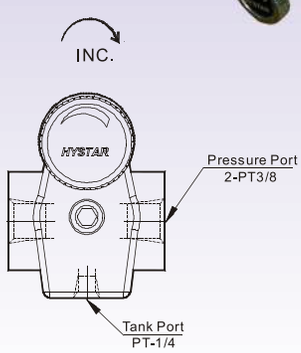

HYSTAR® system™. Hyking Corp. ©2002