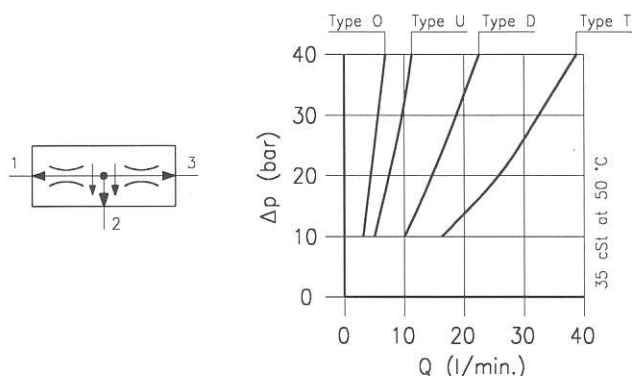
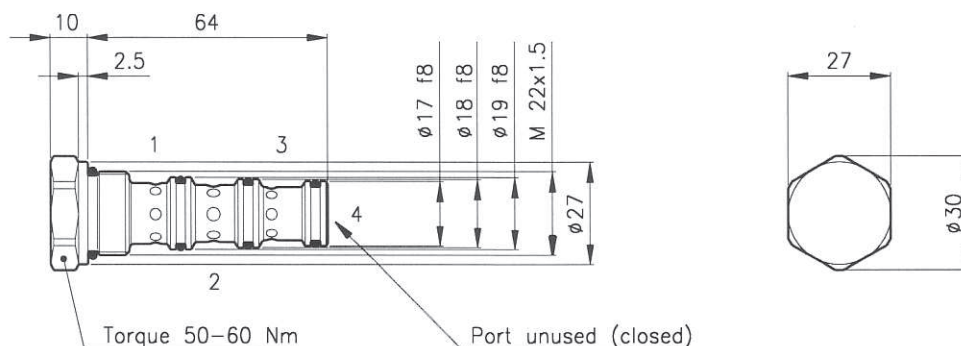



Technical features


Cavity	(For dimensions see catalogue 17.000)	S 30/4
Inlet flow range (l/min.)	type O	3 – 7
	type U	5 – 12
	type D	10 – 24
	type T	18 – 40
Max. pressure	(bar)	210
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.180
Max. accuracy from 10 to 210 bar		5%
Standard flow division	(%)	50/50
Hydraulic fluid; mineral oil HM and HV	ISO 6074	
Recommended filtration; 19/15 ISO 4466 (25 μ absolute)		
Standard seals in Polyurethane and Buna N		

Dimensions

Ordering informations
DCC 30/D

DCC 30 = Valve type



Inlet flow range

O = 3 – 7 l/min

U = 5 – 12 l/min

D = 10 – 24 l/min

T = 18 – 40 l/min

Codes:

DCC 30/O 33 011 101

DCC 30/U 33 011 102

DCC 30/D 33 011 103

DCC 30/T 33 011 104

External seals kit 90 620 105

DCC 30 valves can be assembled on standard bodies 30-CC series; for dimensions see catalogue 16.011