
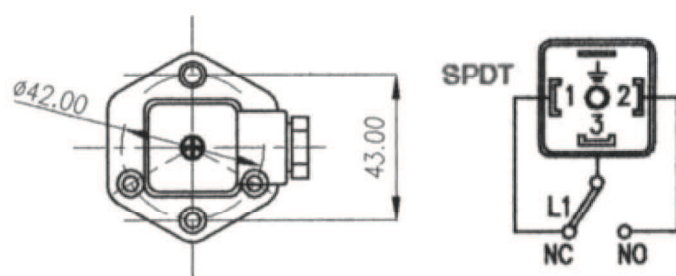


FLG - Floating level indicators

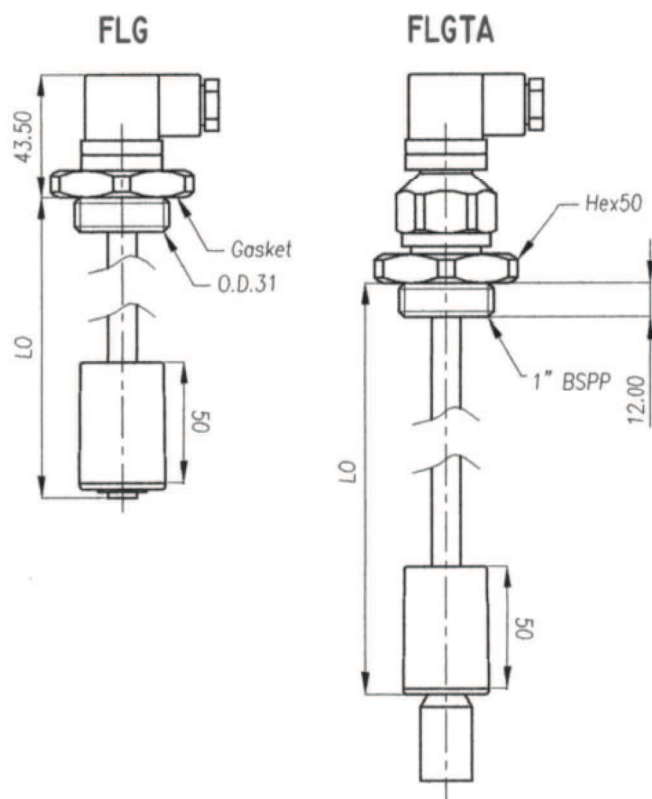

FLG

Compatible with minerals oils, oil-water emulsions, diesel and water. Unsinkable floater.

Electric contact hermetically sealed inside the floater rod. Flanged and screw type fixations both together.

MATERIALS:

Rod: Stainless Steel

Floater: unsinkable rubber

Contacts in exchange:

AC max 48V - 1A

DC max 48V - 0,5 A

Size L0= 100, 150, 200, 250, 300, 350, 400, 450, and 500 mm.

ORDERING CODE

FLG 100

1 2

1- FLG floating level
FLGT floating level with thermometer

2- Dimension (L0)
0-500