



FILTER ELEMENT PRESSURE DROP -10µm FIBERGLASS (CLEAN FILTER)

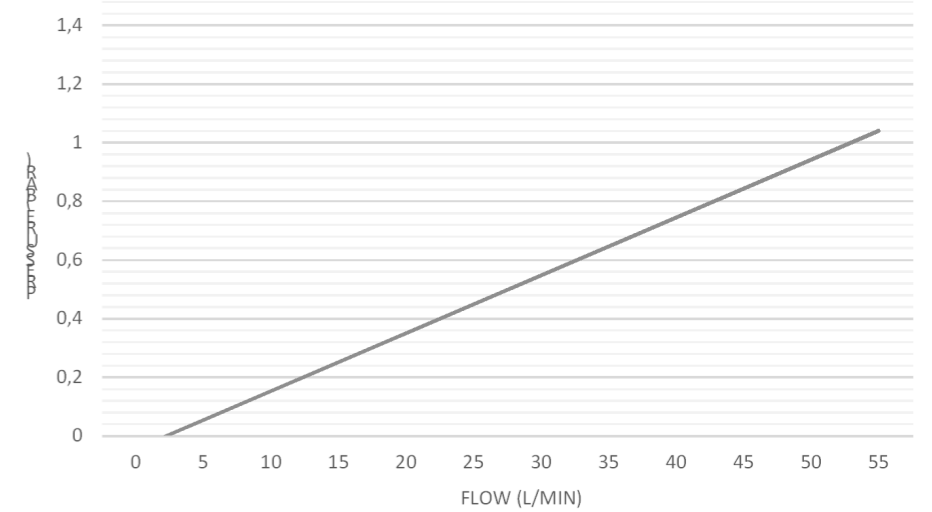

FILTER HOUSING PRESSURE DROP (IN/OUT 3/4")

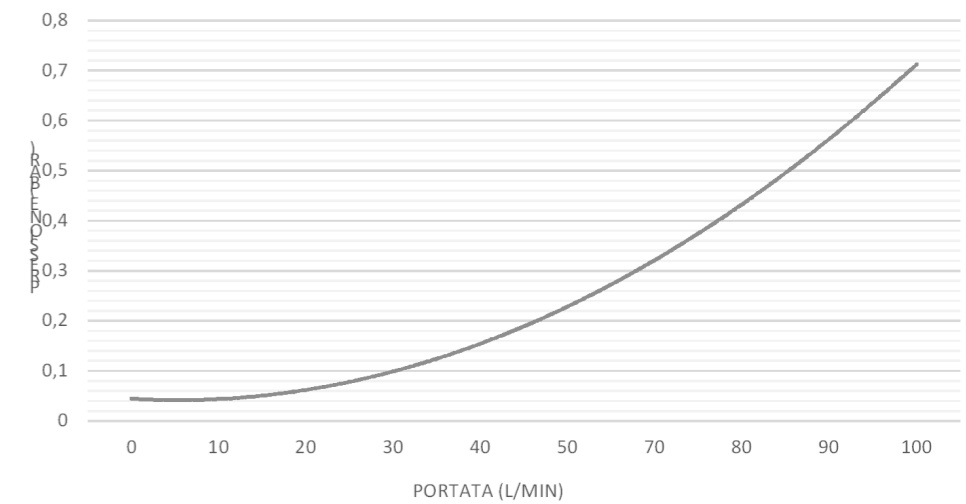

MAX FLOW	50 l/min
WORKING PRESSURE	400 bar
PEAK PRESSURE	620 bar
TYPE OF SEALS	NBR
WORKING TEMPERATURE	-10°C to +80°C

#	PART NUMBER	QTY
1	HPFT302R	1
2	COHPF302	1
3	07-004	1
4	TPHPF12	1

<b>RB HYDRAULICS S.r.l.</b> VIA INDUSTRIA, 37/39 20010 BOFFALORA S. TICINO (MI) info@rbhydraulics.eu	SBAVATURA E INTERRUZIONE DEI BORDI NETTI	NON SCALARE IL DISEGNO REVISIONE
	CODICE: <b>HPF302F10ANR1</b>	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RB HYDRAULICS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RB HYDRAULICS IS PROHIBITED.		TITOLO: <b>HIGH PRESSURE FILTER          3/4" BSP HEAD          10 µm FIBER GLASS</b>
DISEGNATO: MB VERIFICATO: APPROVATO: FATTO: QUALITA':	NOME: MB FIRMA: DATA: 30/06/15	N. DISEGNO: <b>HPF302F10ANR1</b> A4
PESO: PESO		SCALA: 1:2 FOGLIO 1 DI 1