



Technical features



Valves	(For features see catalogue 02.060)	LPA 20
Max. flow	(l/min.)	20
Max. pressure	(bar)	210
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.740
Cracking pressure 90% of setting value		
Reseat pressure 80% of setting value		
Cracking pressure defined with 1 l/min.		
Standard setting obtained with 5 l/min.		
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

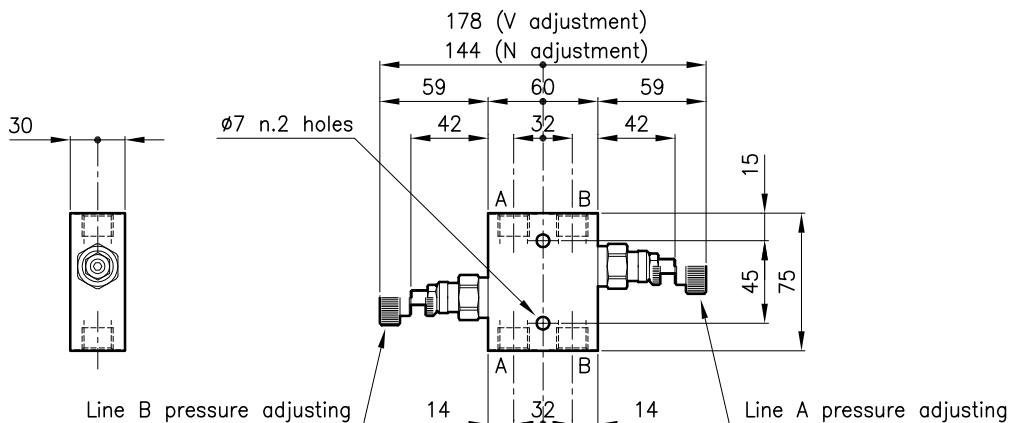

Ordering informations

LPA 20/D-N-CSL 03-B05

Valves type

Standard springs

Type Setting range

U = 10 - 105 bar

D = 70 - 210 bar

Adjustment type

N = Standard adjustment

V = Handknob adjustment

Version

Standard ports

B05 = G 1/4 ISO 228

B06 = G 3/8 ISO 228

Codes:

LPA 20/U-N-CSL 03-B05	21 011 129
LPA 20/D-N-CSL 03-B05	21 011 130
LPA 20/U-V-CSL 03-B05	21 011 131
LPA 20/D-V-CSL 03-B05	21 011 132

LPA 20/U-N-CSL 03-B06	21 011 133
LPA 20/D-N-CSL 03-B06	21 011 134

LPA 20/U-V-CSL 03-B06	21 011 135
LPA 20/D-V-CSL 03-B06	21 011 136

Only body codes:

Body type 20-CSL 03-B05	28 144 107
Body type 20-CSL 03-B06	28 144 108