



Technical features



Valves	(For features see catalogue 02.070)	LPA 30
	(For features see catalogue 05.060)	CAE 30/P
Max. flow	(l/min.)	50
Max. pressure	(bar)	350
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	1.790
Cracking pressure 90% of setting value		
Cracking pressure defined with 1 l/min.		
Standard setting obtained with 10 l/min.		
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

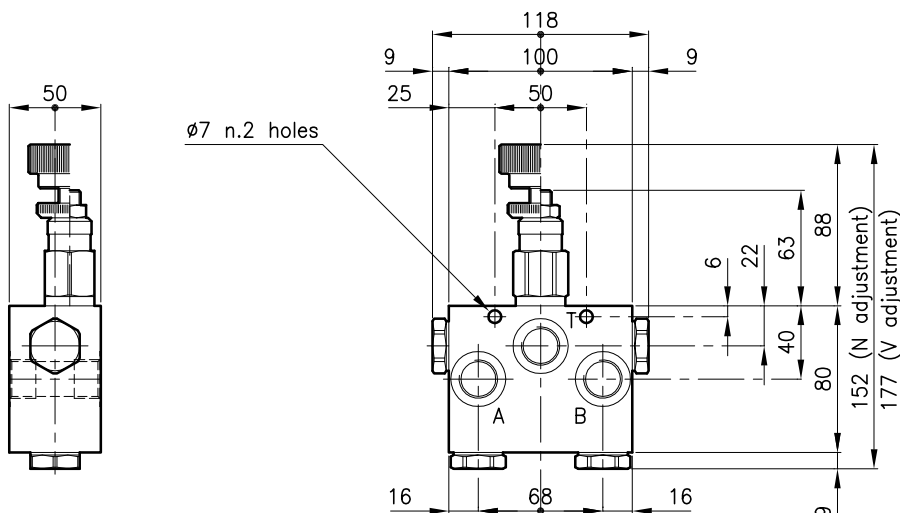

Ordering informations

LPA 30/D-N-CSL 06-B08

Valve type

Standard springs

Type Setting range

U = 10 - 105 bar

D = 70 - 210 bar

T = 140 - 350 bar

Adjustment type

N = Standard adjustment

V = Handknob adjustment

Version

Standard ports

B08 = G 1/2 ISO 228

Codes:

LPA 30/U-N-CSL 06-B08 31 011 192

LPA 30/D-N-CSL 06-B08 31 011 193

LPA 30/T-N-CSL 06-B08 31 011 194

LPA 30/U-V-CSL 06-B08 31 011 195

LPA 30/D-V-CSL 06-B08 31 011 196

LPA 30/T-V-CSL 06-B08 31 011 197

Only body code:

Body type 30-CSL 06-B08 38 144 124