



**Technical features**



|                                                         |                                     |           |
|---------------------------------------------------------|-------------------------------------|-----------|
| Valves                                                  | (For features see catalogue 02.040) | LPE 20    |
|                                                         | (For features see catalogue 05.050) | CAE 20/P  |
| Max. flow                                               | (l/min.)                            | 30        |
| Max. pressure                                           | (bar)                               | 210       |
| Fluid viscosity range                                   | (cSt)                               | 2.8 - 380 |
| Fluid temperature range                                 | (°C)                                | -20 +80   |
| Mass                                                    | (kg)                                | 1.160     |
| Cracking pressure 90% of setting value                  |                                     |           |
| Cracking pressure defined with 1 l/min.                 |                                     |           |
| Standard setting obtained with 10 l/min.                |                                     |           |
| Hydraulic fluid; mineral oil HM and HV ISO 6074         |                                     |           |
| Recommended filtration; 19/15 ISO 4466 (25 µ absolutes) |                                     |           |
| Standard seals in Polyurethane and Buna N               |                                     |           |

**Dimensions**

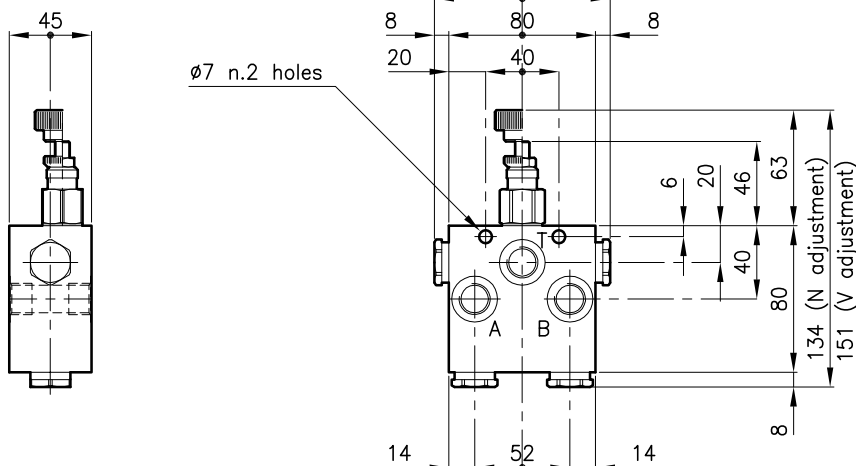

**Ordering informations**

**LPE 20/D-N-CSL 06-B06**

Valve type \_\_\_\_\_

Standard springs

Type Setting range

**U** = 10 - 90 bar

**D** = 35 - 140 bar

**T** = 70 - 210 bar

Adjustment type

**N** = Standard adjustment

**V** = Handknob adjustment

Version \_\_\_\_\_

Standard ports

**B06** = G 3/8 ISO 228

Codes:

|                       |            |
|-----------------------|------------|
| LPE 20/U-N-CSL 06-B06 | 21 011 240 |
| LPE 20/D-N-CSL 06-B06 | 21 011 241 |
| LPE 20/T-N-CSL 06-B06 | 21 011 242 |
| LPE 20/U-V-CSL 06-B06 | 21 011 243 |
| LPE 20/D-V-CSL 06-B06 | 21 011 244 |
| LPE 20/T-V-CSL 06-B06 | 21 011 245 |

Only body code:

|                         |            |
|-------------------------|------------|
| Body type 20-CSL 06-B06 | 28 144 117 |
|-------------------------|------------|