



Technical features

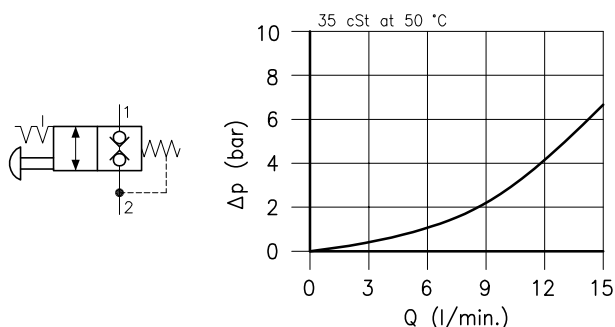

Cavity	(For dimensions see catalogue 17.001)	S 28/2
Max. flow	(l/min.)	15
Max. pressure	(bar)	315
Driving force (min.)	(N)	35
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.140
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

Pressure of chamber 2 influences the necessary force for valve's drive
(35 N + 28 N every 10 bar in chamber 2).

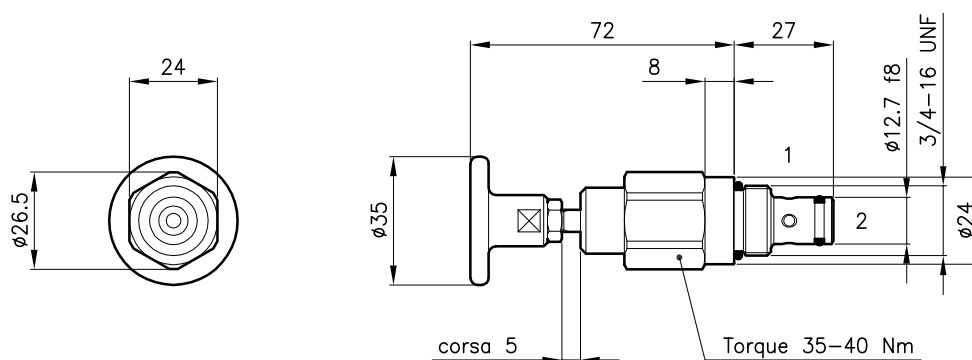


External parts with anticorrosive treatment.


Ordering informations

MCD 28/2202-PB

MCD 28 = Valve type



Circuit



Driving type

PB = Push type detented



Codes:

MCD 28/2202-PB 22 011 165

External seals kit 90 620 113

ECD 28/2202 valves can be assembled on standard bodies 28-L0 series; for dimensions see catalogue 16.020