
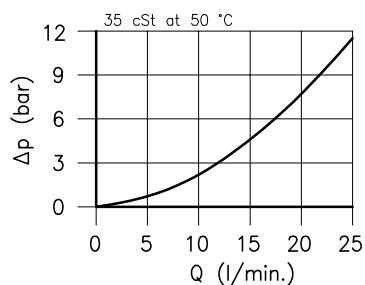




Technical features



Cavity	(For dimensions see catalogue 17.001)	S 32/2
Max. flow	(l/min.)	25
Max. pressure	(bar)	315
Driving force (min.)	(N)	35
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.120
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

Pressure of chamber 2 influences the necessary force for valve's drive
(35 N + 28 N every 10 bar in chamber 2)

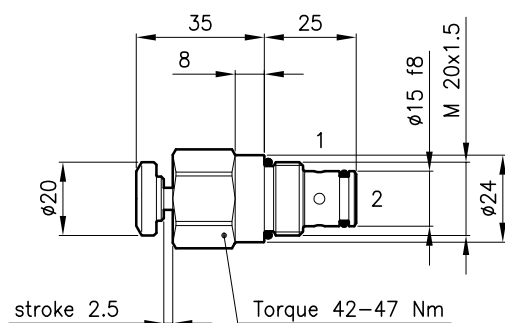

Ordering informations


MCD 32/2202-PS

MCD 32 = Valve type



Circuit

2202 =



Driving type

PS = Push type spring return



Codes:

MCD 32/2202-PS 32 011 115

External seals kit (P) 90 620 115