




Technical features

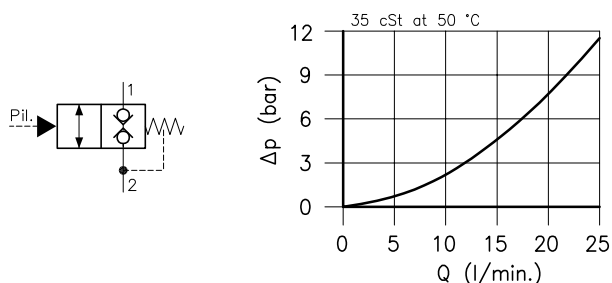

Cavity	(For dimensions see catalogue 17.001)	S 32/2
Max. flow	(l/min.)	25
Max. pressure	(bar)	315
Pilot pressure (min.)	(bar)	10 – 15
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.140
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions


Pressure of chamber 2 influences the necessary pilot pressure for valve's drive (pilot ratio 1:1).

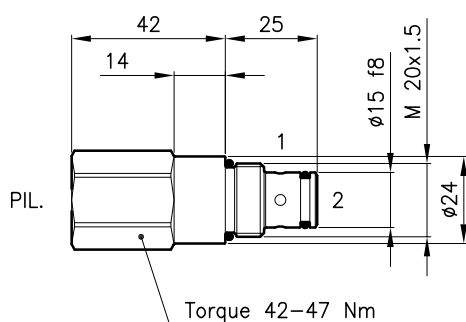


Ordering informations

OCD 32/2202

OCD 32 = Valve type



Circuit



Codes:

OCD 32/2202 32 011 116

External seals kit (P) 90 620 115