

DIMENSIONS

MILLIMETERS(INCHES)

HT Series-Roller Chain Flexible Coupling

Construction: Steel sprockets and roller chain
Aluminum alloy casings




Ordering Code

HT 4012

HT

Size
4012
4016
5016
5018
6018
6022
8018
8022
10020
12018
12022

Series No.



Ratings

Coupling HT Type	Bore Diameter		E mm (in)	L mm (in)	D mm (in)	H mm (in)	Weight kg (lb)	Casing No.	A mm (in)	B mm (in)	Weight kg (lb)
	Min.	Max.									
HT4012	11 (.43)	22 (.86)	80 (3.14)	36 (1.41)	35 (1.37)	61 (2.40)	.8 (1.77)	HT4012	75 (2.95)	75 (2.95)	.3 (.66)
HT4016	15 (.59)	30 (1.18)	80 (3.14)	36 (1.41)	50 (1.96)	77 (3.03)	1.4 (3.10)	HT4016	92 (3.62)	75 (2.95)	.4 (.88)
HT5016	15 (.59)	40 (1.57)	100 (3.93)	45 (1.77)	60 (2.36)	96 (3.77)	2.6 (5.77)	HT5016	111 (4.37)	85 (3.34)	.6 (1.33)
HT5018	19 (.74)	45 (1.77)	100 (3.93)	45 (1.77)	70 (2.75)	106 (4.17)	3.5 (7.77)	HT5018	122 (4.80)	85 (3.34)	.7 (1.55)
HT6018	22 (.86)	55 (2.16)	120 (4.72)	54 (2.12)	85 (3.34)	128 (5.03)	6.2 (13.7)	HT6018	142 (5.59)	106 (4.17)	1.0 (2.22)
HT6022	25 (.98)	75 (2.95)	120 (4.72)	54 (2.12)	110 (4.33)	152 (5.98)	9.8 (21.7)	HT6022	167 (6.57)	106 (4.17)	1.2 (2.66)
HT8018	30 (1.18)	78 (3.07)	150 (5.90)	67 (2.63)	115 (4.52)	170 (6.69)	13.9 (30.8)	HT8018	186 (7.32)	130 (5.11)	2.3 (5.10)
HT8022	35 (1.37)	95 (3.74)	150 (5.90)	67 (2.63)	140 (5.51)	202 (7.95)	20.2 (44.8)	HT8022	220 (8.66)	130 (5.11)	2.4 (5.32)
HT10020	35 (1.37)	110 (4.33)	201 (7.91)	91 (3.58)	160 (6.29)	228 (8.97)	34 (75.4)	HT10020	248 (9.76)	152 (5.98)	3.2 (7.10)
HT12018	48 (1.88)	120 (4.72)	261 (10.2)	119 (4.68)	170 (6.69)	252 (9.92)	51 (113)	HT12018	305 (12.0)	180 (7.08)	5.6 (12.4)
HT12022	58 (2.28)	150 (5.90)	261 (10.2)	119 (4.68)	210 (8.26)	300 (11.8)	66 (146)	HT12022	355 (13.9)	180 (7.08)	7.1 (15.7)

OR Series-Oil Cooler



Ordering Code

OR 60L

OR

Size
60L
100L
150L
250L
350L
600L
800L
1000L

Series No.

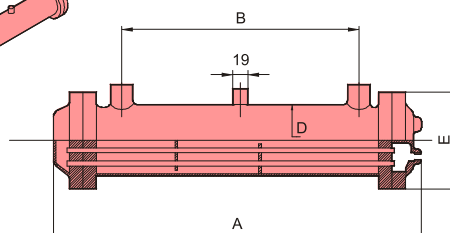

Ratings

Series	A mm (in)	B mm (in)	C mm (in)	φD mm (in)	φE mm (in)	F mm (in)	G mm (in)	BRASS TUBE (pcs)	Flow lpm	Weight kg(lb)
OR-60L	460 (18.1)	295 (11.6)	40 (1.57)	89.1 (3.50)	120 (4.72)	3/4"	3/4"	22	60	8 (17.7)
OR-100L	542 (21.3)	370 (14.5)	40 (1.57)	114.3 (4.50)	120 (4.72)	3/4"	3/4"	26	100	10 (22.2)
OR-150L	573 (22.5)	375 (14.7)	75 (2.95)	139.8 (5.50)	170 (6.69)	1 1/4"	3/4"	42	150	15 (33.3)
OR-250L	800 (31.4)	600 (23.6)	75 (2.95)	139.8 (5.50)	170 (6.69)	1 1/4"	3/4"	58	250	22 (48.8)
OR-350L	1198 (47.1)	1000 (39.3)	75 (2.95)	139.8 (5.50)	170 (6.69)	1 1/4"	3/4"	58	350	30 (66.6)
OR-600L	1215 (47.8)	970 (38.1)	86 (3.38)	165.2 (6.50)	196 (7.71)	2"	1 1/2"	58	600	40 (88.8)
OR-800L	1715 (67.5)	1470 (57.8)	86 (3.38)	165.2 (6.50)	196 (7.71)	2"	1 1/2"	58	800	50 (111)
OR-1000L	2135 (84.0)	1890 (74.4)	86 (3.38)	165.2 (6.50)	196 (7.71)	2"	1 1/2"	58	1000	70 (15.5)