



D

Ordering Code


RC - T - 03 - B - 20

Series No	Type of Mounting	Valve Size	Pressure Range	Design No
R: Pressure Reducing Valves RG/RT	G Subplate Mounting 	03: (3/8") ISO 5781-AG-06-2-A	B: 7~70 bar (100~1000 PSI) 	20 (G) DIN 912 bolts 
RC: Pressure Reducing and Check Valves RCG/RCT	T Threaded Connection 	06: (3/4") ISO 5781-AH-08-2-A	C: 35~140 bar (500~2000 PSI) 	2090 (G) UNC bolts (North America) 
			H: 70~225 bar (1000~3200 PSI) 	20 (T) PT Connection 
				2090 (T) NPT Connection (North America) 




SYMBOL

RG

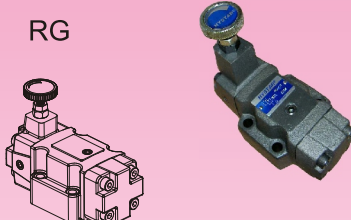


RT


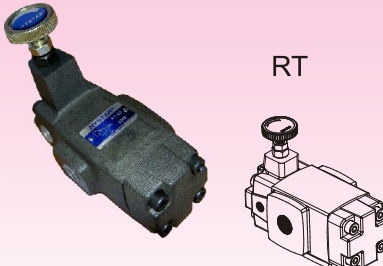


MODEL	DESCRIPTION	PAGE
RG-03-06	Pressure Reducing Valves(Sub-Plate Type)	260
RT-03-06	Pressure Reducing Valves(Threaded Type)	260
RCG-03-06	Pressure Reducing with Check Valves(Sub-Plate Type)	261
RCT-03-06	Pressure Reducing with Check Valves(Threaded Type)	261

RCG

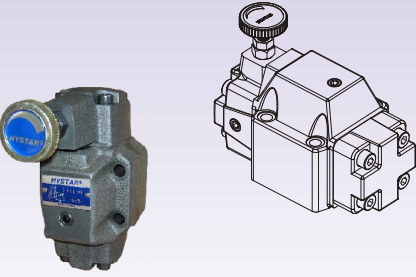

RCT



SYMBOL

RCT-06

