




## DIMENSIONS

MILLIMETERS(INCHES)

### RG-03-06

### Pressure Reducing Valves(Sub-Plate Type)





#### Valve Specifications & Attachment

| Model           | RG-03              | RG-06              |
|-----------------|--------------------|--------------------|
| Flow Rating     | 50 lpm (13.2 gpm)  | 125 lpm (33 gpm)   |
| Max. Pressure   | 250 bar (3600 psi) | 250 bar (3600 psi) |
| Weight kg(lbs.) | 4.5 (9.9)          | 6.8 (15.0)         |
| CODE:20         | M10 X50LgX4pcs     | M10 X50LgX4pcs     |
| CODE:2090       | 3/8-16UNCX2LgX4pcs | 3/8-16UNCX2LgX4pcs |
| Surface O-Ring  | P9X1pc, P18X2pc    | P9X2pc, P29X2pc    |
| ISO Mounting    | 5781-AG-06-2-A     | 5781-AH-08-2-A     |




SYMBOL

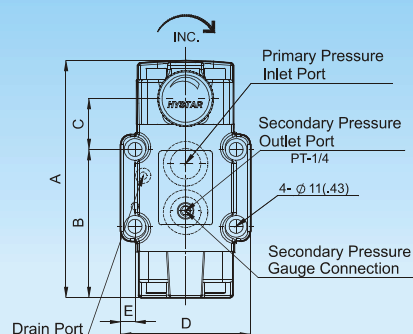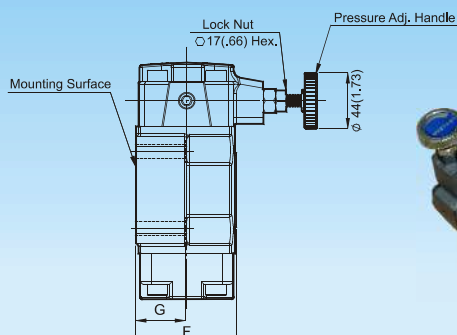

| Model | A         | B           | C          | D         | E         | F        | G        | H           | I        | J          |
|-------|-----------|-------------|------------|-----------|-----------|----------|----------|-------------|----------|------------|
| RG-03 | 159(6.25) | 93.5(3.68)  | 40.5(1.59) | 89(3.50)  | 11.2(.44) | 69(2.71) | 42(1.65) | 145.5(5.72) | 43(1.69) | 44.5(1.75) |
| RG-06 | 186(7.32) | 116.5(4.58) | 40(1.57)   | 102(4.01) | 11.3(.44) | 79(3.11) | 39(1.53) | 143(5.62)   | 40(1.57) | 51(2.00)   |

### RT-03-06

### Pressure Reducing Valves(Threaded Type)






#### Valve Specifications & Attachment

| Model           | RT-03              | RT-06              |
|-----------------|--------------------|--------------------|
| Flow Rating     | 50 lpm (13.2 gpm)  | 125 lpm (33 gpm)   |
| Max. Pressure   | 250 bar (3600 psi) | 250 bar (3600 psi) |
| Weight kg(lbs.) | 4.3 (9.5)          | 6.9 (15.2)         |
| CODE:20         | 3/8" PT            | 3/4" PT            |
| CODE:2090       | 3/8" NPT           | 3/4" NPT           |



SYMBOL

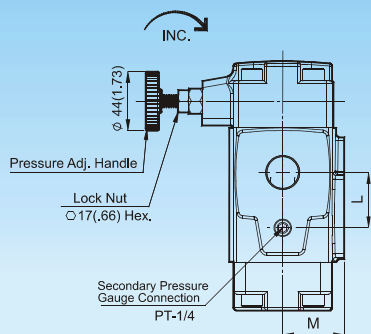

| Model | A         | B         | C        | D        | E        | F          | G        | H           | I        | J        | K        | L        | M          |
|-------|-----------|-----------|----------|----------|----------|------------|----------|-------------|----------|----------|----------|----------|------------|
| RT-03 | 159(6.25) | 86(3.38)  | 48(1.88) | 30(1.18) | 74(2.91) | 41.5(1.63) | 47(1.85) | 151(5.94)   | 42(1.65) | 80(3.14) | 40(1.57) | 30(1.18) | 41.5(1.63) |
| RT-06 | 186(7.32) | 103(4.05) | 53(2.08) | 34(1.33) | 86(3.38) | 46(1.81)   | 53(2.08) | 148.5(5.84) | 46(1.81) | 96(3.77) | 48(1.88) | 42(1.65) | 46(1.81)   |