



Technical features

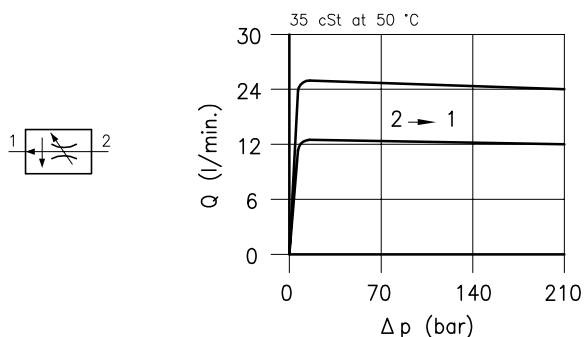

Cavity	(For dimensions see catalogue 17.000)	S 30/2
Flow setting range (l/min.)	type D	0.05 – 12
	type Q	0.05 – 24
Max. pressure	(bar)	315
Min. pressure difference	(bar)	7
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	–20 +80
Mass	(kg)	0.240
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Complete adjustment range obtained with 1 knob turn		
Standard seals in Polyurethane and Buna N		


Dimensions

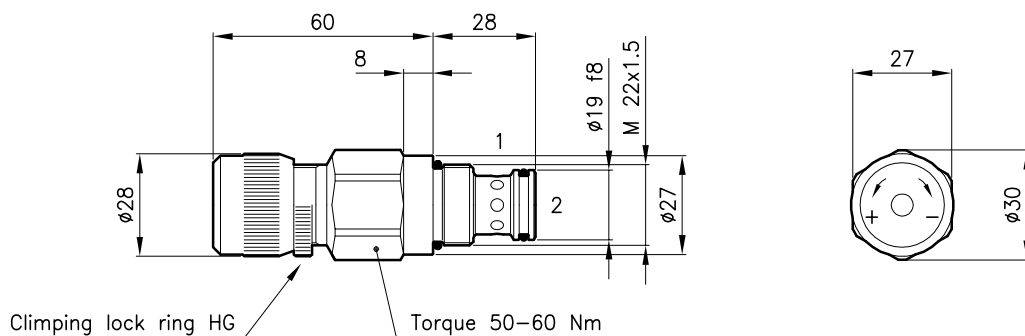

Ordering informations

RDZ 30/D-H

RDZ 30 = Valve type



Flow setting range

D = 0.05 – 12 l/min

Q = 0.05 – 24 l/min

Adjustment type

H = Standard

HG = With clamping lock ring

Codes:

RDZ 30/D-H	33 011 117
RDZ 30/Q-H	33 011 118
RDZ 30/D-HG	33 011 139
RDZ 30/Q-HG	33 011 140
External seals kit	90 620 103

RDZ 30 valves can be assembled on standard bodies 30-LO series; for dimensions see catalogue 16.010