


Technical features


The RMB 20/B are manual valves total shut off – guided ball-type. They are normally used as interceptor or by-pass for manual override.

The flow direction is indifferent.

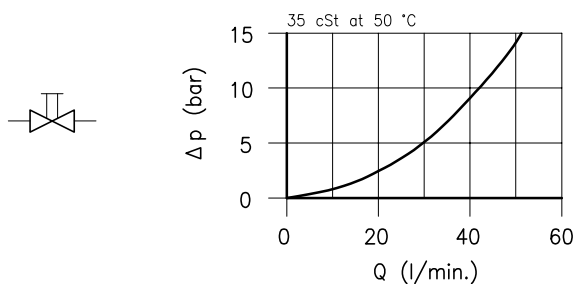

Cavity	(For dimensions see catalogue 17.000)	S 20/2
Nominal flow	(l/min.)	40
Max. pressure	(bar)	315
Fluid viscosity range	(cSt)	2.8 – 380
Fluid temperature range	(°C)	−20 +80
Mass	(kg)	0.110
Leakage when closed	Total shut off	
Hydraulic fluid; mineral oil HM and HV		ISO 6074
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

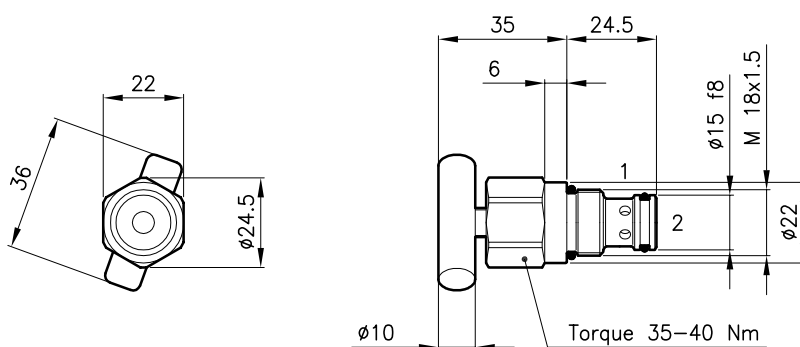

Handknob and screw adjustment realized in stanless steel.
External exagon realized in brass.

Ordering informations

RMB 20/B

RMB 20 = Valve type



Adjustment type

B = Handknob adjustment



Codes:

RMB 20/B 22 011 146

External seals kit 90 620 100

RMB 20/B valves can be assembled on standard bodies 20-LO series; for dimensions see catalogue 16.010