


### BSG-03-06-10-2P

### Solenoid Controlled Relief Valves-Dual Pressure (Sub-Plate Type)







#### Valve Specifications & Attachment

| Model           | BSG-03                                           | BSG-06                                           | BSG-10                                           |
|-----------------|--------------------------------------------------|--------------------------------------------------|--------------------------------------------------|
| Flow Rating     | 100 lpm (26.4 gpm)                               | 200 lpm (52.8 gpm)                               | 400 lpm (106 gpm)                                |
| Max. Pressure   | 250 bar (3600 psi)                               | 250 bar (3600 psi)                               | 250 bar (3600 psi)                               |
| Weight kg(lbs.) | 7.1 (15.6)                                       | 8.0 (17.6)                                       | 11.3 (24.9)                                      |
| CODE:20         | M12 X70LgX2pcs<br>M12 X89LgX2pcs                 | M16 X60LgX2pcs<br>M16 X80LgX2pcs                 | M20X70LgX2pcs<br>M20X90LgX2pcs                   |
| CODE:2090       | 1/2-13UNCX2-3/4LgX2pcs<br>1/2-13UNCX3-3/4LgX2pcs | 5/8-11UNCX2-1/4LgX2pcs<br>1/2-13UNCX3-1/4LgX2pcs | 3/4-10UNCX2-3/4LgX2pcs<br>3/4-10UNCX3-1/2LgX2pcs |
| Surface O-Ring  | P9X1pc, P20X2pc                                  | P10AX1pc, P29X2pc                                | P10AX1pc, P36X2pc                                |
| ISO Mounting    | 6264-AR-06-2-A                                   | 6264-AS-08-2-A                                   | 6264-AT-10-2-A                                   |



SYMBOL

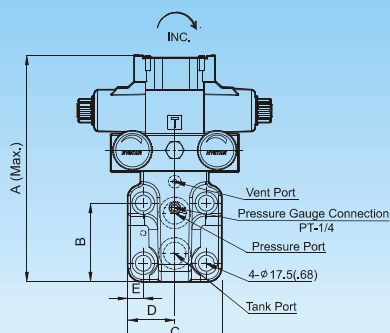


■ Dimensions for models with Din connector, reference page 14 for details.

| Model     | A           | B          | C         | D          | E         | F        | G          | H          | I        | J         |
|-----------|-------------|------------|-----------|------------|-----------|----------|------------|------------|----------|-----------|
| BSG-03-2P | 224(8.81)   | 75.5(2.97) | 83(3.26)  | 41.5(1.63) | 14.5(.57) | 70(2.75) | 77.5(3.05) | 40(1.57)   | 41(1.61) | 146(5.74) |
| BSG-06-2P | 251.5(9.90) | 87.5(3.44) | 104(4.09) | 52(2.04)   | 17(.66)   | 78(3.07) | 60(2.36)   | 40(1.57)   | 41(1.61) | 146(5.74) |
| BSG-10-2P | 289.5(11.3) | 106(4.17)  | 125(4.92) | 62.5(2.46) | 21.2(.83) | 83(3.26) | 69.5(2.73) | 49.5(1.94) | 46(1.81) | 280(11.0) |

### SBSG-03-06-10

### Low Noise Type Solenoid Controlled Relief Valves(Sub-Plate Type)




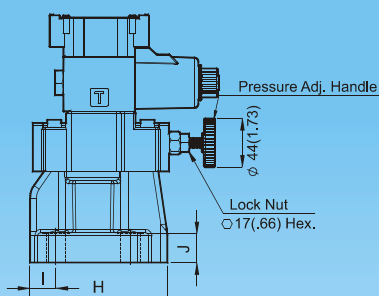


#### Valve Specifications & Attachment

| Model           | SBSG-03              | SBSG-06            | SBSG-10                |
|-----------------|----------------------|--------------------|------------------------|
| Flow Rating     | 100 lpm (26.4 gpm)   | 200 lpm (52.8 gpm) | 400 lpm (106 gpm)      |
| Max. Pressure   | 250 bar (3600 psi)   | 250 bar (3600 psi) | 250 bar (3600 psi)     |
| Weight kg(lbs.) | 6.3 (13.9)           | 7.2 (15.9)         | 12.7 (28.0)            |
| CODE:20         | M12 X40LgX4pcs       | M16 X50LgX4pcs     | M20 X60LgX4pcs         |
| CODE:2090       | 1/2-13UNCX1/3LgX4pcs | 5/8-11UNCX2LgX4pcs | 3/4-10UNCX2-1/4LgX4pcs |
| Surface O-Ring  | P9X1pc, P20X2pc      | P10AX1pc, P28X2pc  | P10AX1pc, P36X2pc      |
| ISO Mounting    | 6264-AR-06-2-A       | 6264-AS-08-2-A     | 6264-AT-10-2-A         |



SYMBOL

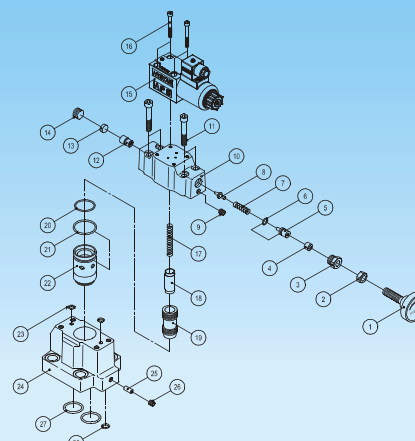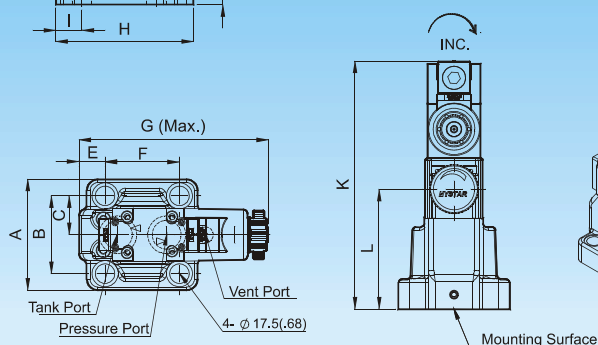

■ Dimensions for models with Din connector, reference page 14 for details.

| Model    | A         | B          | C        | D         | E          | F        | G         | H         | I          | J        | K         |
|----------|-----------|------------|----------|-----------|------------|----------|-----------|-----------|------------|----------|-----------|
| S-BSG-03 | 78(3.07)  | 54(2.12)   | 27(1.06) | 12(.47)   | 34.5(1.35) | 54(2.12) | 169(6.65) | 107(4.21) | 26.5(1.04) | 23(.90)  | 222(8.74) |
| S-BSG-06 | 100(3.93) | 70(2.75)   | 35(1.37) | 15(.59)   | 23.5(.92)  | 67(2.63) | 171(6.73) | 124(4.88) | 23.5(.92)  | 26(1.02) | 224(8.81) |
| S-BSG-10 | 127(5.00) | 82.6(3.25) | 41(1.61) | 22.2(.87) | 20.5(.80)  | 89(3.50) | 190(7.48) | 155(6.10) | 20.5(.80)  | 36(1.41) | 273(10.7) |