




Ordering Code


SRC - T - 03 - 20

Series No	Type of Mounting	Valve Size	Design No
SR: Restrictor	G Subplate Mounting	03: (3/8") ISO 5781-AG-06-2-A	20 (G) DIN 912 bolts
SRG			
SRC: One Way Restrictor	T Threaded Connection	06: (3/4") ISO 5781-AH-08-2-A	2090 (G) UNC bolts (North America)
			
SRCG		10: (1 1/4") ISO 5781-AJ-10-2-A	20 (T) PT Connection
			
			2090 (T) NPT Connection (North America)
			




SYMBOL

SRG





MODEL	DESCRIPTION	PAGE
SRG-03-06	Restrictors(Sub-Plate Type)	299
SRG-10	Restrictors(Sub-Plate Type)	299
SRCG-03-06	One Way Restrictors(Sub-Plate Type)	300
SRCG-10	One Way Restrictors(Sub-Plate Type)	300
SRCT-03-06	One Way Restrictors(Threaded Type)	301
SRCT-10	One Way Restrictors(Threaded Type)	301

SRCG

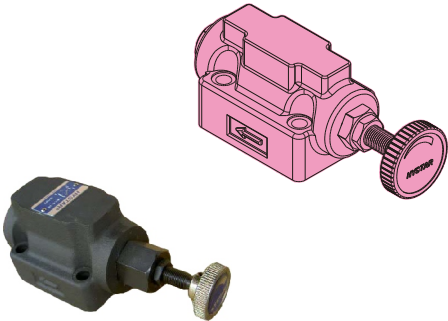

SRCT



SYMBOL





DIMENSIONS

MILLIMETERS(INCHES)

SRG-03-06

Restrictors(Sub-Plate Type)

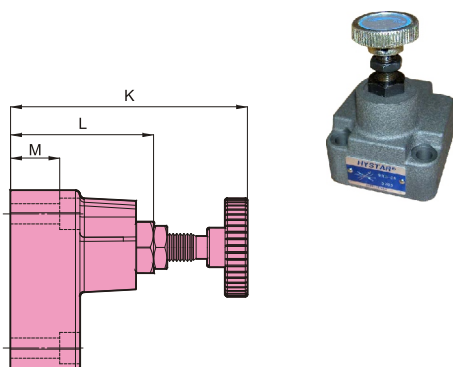


Valve Specifications & Attachment

Model	SRG-03	SRG-06
Flow Rating	30 lpm (7.9 gpm)	85 lpm (22.4 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	2.5 (5.5)	3.9 (8.6)
CODE:20	M10 X45LgX4pcs	M10X50LgX4pcs
CODE:2090	3/8-16UNCX1-3/4LgX4pcs	3/8-16UNCX2LgX4pcs
Surface O-Ring	P18X2pc	P29X2pc
ISO Mounting	5781-AG-06-2-A	5781-AH-08-2-A





SYMBOL

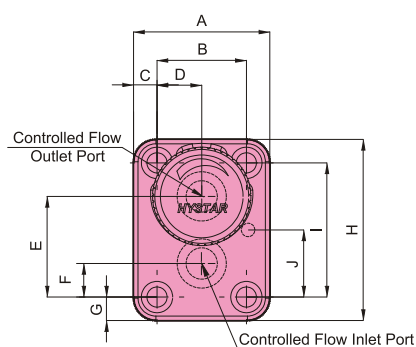

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
SRG-03	61(2.40)	40(1.57)	10.5(.41)	20(.78)	45(1.77)	15(.59)	10.5(.41)	81(3.18)	60(2.36)	30(1.18)	106(4.17)	64(2.51)	22(.86)
SRG-06	81(3.18)	58(2.28)	11.5(.45)	29(1.14)	54(2.12)	16(.62)	11.5(.45)	93(3.66)	70(2.75)	35(1.37)	125(4.92)	69(2.71)	32.5(1.27)

SRG-10

Restrictors(Sub-Plate Type)




Valve Specifications & Attachment

Model	SRG-10
Flow Rating	230 lpm (60.7 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	7.5 (16.5)
CODE:20	M10 X55LgX6pcs
CODE:2090	3/8-16UNCX2-1/4LgX6pcs
Surface O-Ring	P38X2pc
ISO Mounting	5781-AJ-10-2-A



SYMBOL

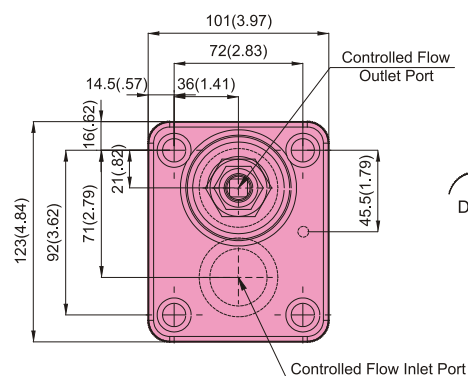


DIMENSIONS

MILLIMETERS(INCHES)

SRCG-03-06

One Way Restrictors(Sub-Plate Type)

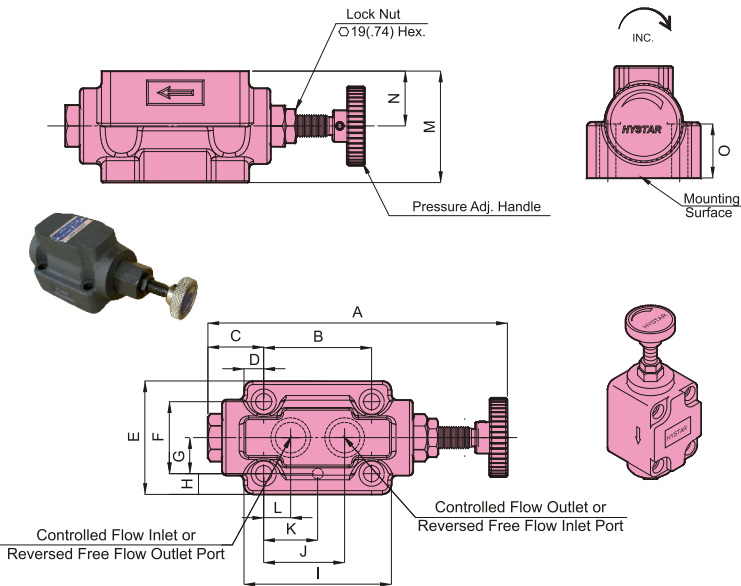


Valve Specifications & Attachment

Model	SRCG-03	SRCG-06
Flow Rating	30 lpm (7.9 gpm)	85 lpm (22.4 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	2.5 (5.5)	3.9 (8.6)
CODE:20	M10 X45LgX4pcs	M10X50LgX4pcs
CODE:2090	3/8-16UNCX1-3/4LgX4pcs	3/8-16UNCX2LgX4pcs
Surface O-Ring	P18X2pc	P29X2pc
ISO Mounting	5781-AG-06-2-A	5781-AH-08-2-A




SYMBOL

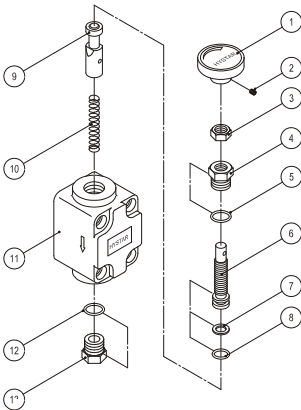

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
SRCG-03	167(6.57)	60(2.36)	31(1.22)	11(.43)	63(2.48)	40(1.57)	20(.78)	11.5(.45)	82(3.22)	45(1.77)	30(1.18)	15(.59)	62(2.44)	30.5(1.20)	30(1.18)
SRCG-06	198(7.79)	70(2.75)	30.5(1.20)	10.5(.41)	80(3.14)	58(2.28)	29(1.14)	11(.43)	91(3.58)	54(2.12)	35(1.37)	16(.62)	74(2.91)	30(1.18)	30(1.18)

SRCG-10

One Way Restrictors(Sub-Plate Type)

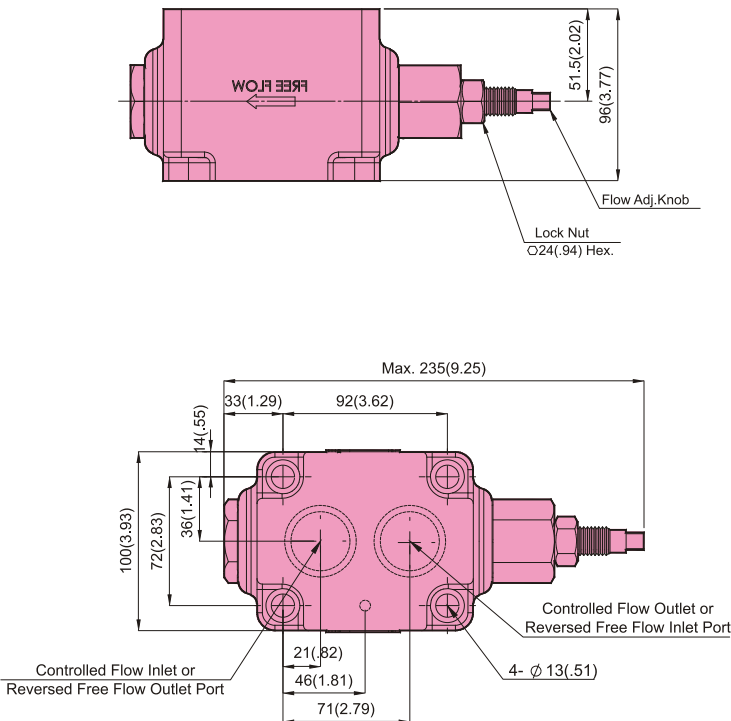


Valve Specifications & Attachment

Model	SRCG-10
Flow Rating	230 lpm (60.7 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	7.5 (16.5)
CODE:20	M10 X55LgX6pcs
CODE:2090	3/8-16UNCX2-1/4LgX6pcs
Surface O-Ring	P34X2pc
ISO Mounting	5781-AJ-10-2-A



SYMBOL






DIMENSIONS

MILLIMETERS(INCHES)

SRCT-03-06 One Way Restrictors(Threaded Type)



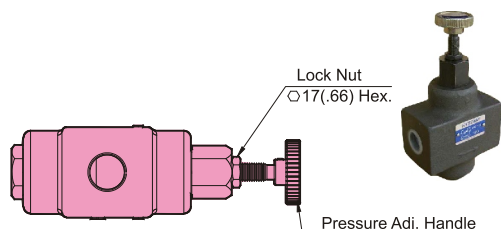


Valve Specifications & Attachment

Model	SRCT-03	SRCT-06
Flow Rating	30 lpm (7.9 gpm)	85 lpm (22.4 gpm)
Max. Pressure	250 bar (3600 psi)	250 bar (3600 psi)
Weight kg(lbs.)	1.5 (3.3)	3.8 (8.4)
CODE:20	3/8" PT	3/4" PT
CODE:2090	3/8" NPT	3/4" NPT




SYMBOL

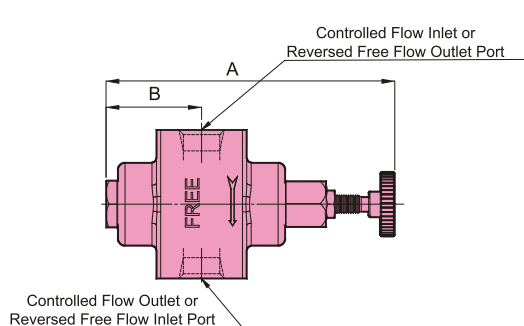

Model	A	B	C	D	E	F
SRT-03	125(4.92)	25(.98)	43(1.69)	21.5(.84)	72(2.83)	36(1.41)
SRCT-06	167(6.57)	61(2.40)	43(1.69)	21.5(.84)	72(2.83)	36(1.41)
SRCT-10	198(7.79)	65.5(2.57)	62(2.44)	31(1.22)	102(4.01)	51(2.00)

SRCT-10 One Way Restrictors(Threaded Type)

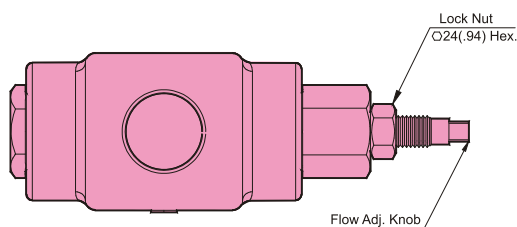

Valve Specifications & Attachment

Model	SRCT-10
Flow Rating	230 lpm (60.7 gpm)
Max. Pressure	250 bar (3600 psi)
Weight kg(lbs.)	9.1 (20.1)
CODE:20	1 1/4 PT
CODE:2090	1 1/4 NPT



SYMBOL

