




DIMENSIONS

MILLIMETERS(INCHES)

HCG-03-06-10

HC Type Pressure Control Valves(Sub-Plate Type)





Valve Specifications & Attachment

Model	HCG-03	HCG-06	HCG-10
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)	250 lpm (66 gpm)
Max. Pressure	210 bar (3000 psi)	210 bar (3000 psi)	210 bar (3000 psi)
Weight kg(lbs.)	4.8 (10.6)	7.4 (16.3)	13.8 (30.4)
CODE:20	M10 X70LgX4pcs	M10 X80LgX4pcs	M10X90LgX6pcs
CODE:2090	3/8-16UNCX2-3/4LgX4pcs	3/8-16UNCX3-1/4LgX4pcs	3/8-16UNCX3-1/2LgX6pcs
Surface O-Ring	P9X2pc, P18X2pc	P9X2pc, P28X2pc	P9X2pc, P38X2pc
ISO Mounting	5781-AG-06-2-A	5781-AG-08-2-A	5781-AJ-10-2-A




SYMBOL

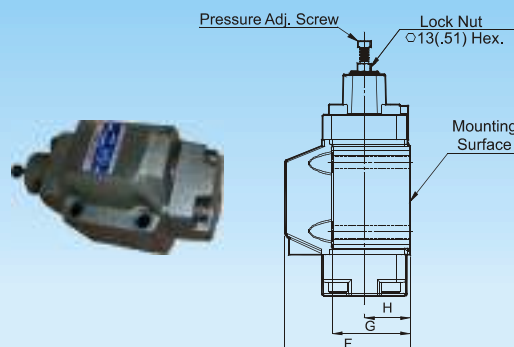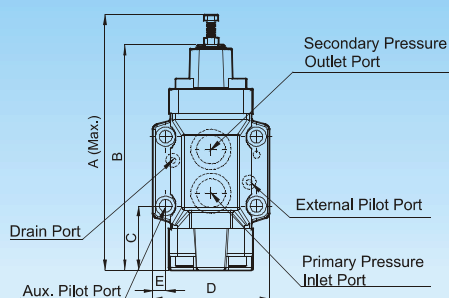


Model	A	B	C	D	E	F	G	H	I	J
HCG-03	192(7.55)	167.5(6.59)	50.6(1.99)	89(3.50)	11.2(.44)	90(3.54)	58(2.28)	35(1.37)	13(.51)	13(.51)
HCG-06	222(8.74)	196(7.71)	60(2.36)	102(4.01)	11.3(.44)	109(4.29)	68(2.67)	40(1.57)	13(.51)	13(.51)
HCG-10	266(10.4)	239(9.40)	65(2.55)	119(4.68)	11.1(.43)	131(5.15)	80(3.14)	48(1.88)	5(.19)	17(.66)

HCT-03-06-10

HC Type Pressure Control Valves(Threaded Type)



INC.





Valve Specifications & Attachment

Model	HCT-03	HCT-06	HCT-10
Flow Rating	50 lpm (13.2 gpm)	125 lpm (33 gpm)	250 lpm (66 gpm)
Max. Pressure	210 bar (3000 psi)	210 bar (3000 psi)	210 bar (3000 psi)
Weight kg(lbs.)	4.1 (9.0)	7.1 (15.6)	13.8 (30.4)
CODE:20	3/8 PT	3/4 PT	1 1/4 PT
CODE:2090	3/8 NPT	3/4 NPT	1 1/4 NPT



SYMBOL

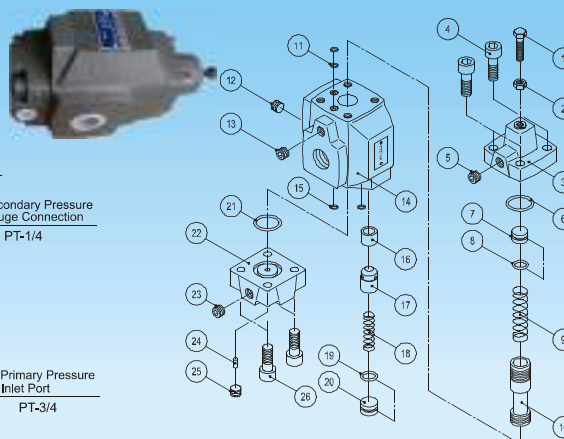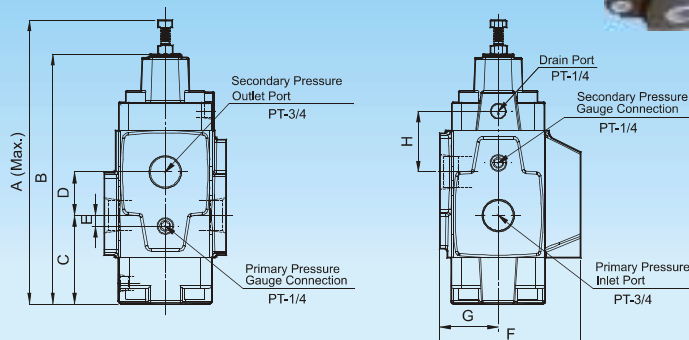

Model	A	B	C	D	E	F	G	H	I	J	K	L
HCT-03	192(7.55)	168(6.61)	58(2.28)	30(1.18)	0	95(3.74)	41.5(1.63)	39(1.53)	45(1.77)	13(.51)	13(.51)	1/8
HCT-06	223(8.77)	196(7.71)	69.5(2.73)	34(1.33)	8.3(.32)	111(4.37)	46(1.81)	48(1.88)	53.5(2.08)	13(.51)	13(.51)	1/4
HCT-10	266(10.4)	246(9.68)	87(3.42)	40(1.57)	15(.59)	154(6.06)	64(2.51)	58(2.28)	68(2.67)	5(.19)	17(.66)	1/4